

GINO 400 HIGH POWER LED

LARGE SIZE



Modern luminaires made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top and wall installation. Provided with double PMMA diffusers and with reflective ceiling designed to host the lighting source. Equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo e a parete. Provvisto di un doppio diffusore in metacrilato e di soffitto riflettente, progettato per accogliere la sorgente luminosa. Fornito completo di **lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



F50.000.Q1K

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

**+80°C
-30°** **90% HUMIDITY**

VOLTAGE SURGE RESISTANT



DRIVER SILICONE PROTECTION



PUBLIC



RECYCLABLE



ANTI-SHOCK




TEMPERATURE



WALL



POST



GINO 400 HIGH POWER LED - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.

INNER DIFFUSER made of opal PMMA to gather the lighting output and get its uniform spread.

DIFFUSORE INTERNO realizzato in PMMA opale per raccogliere il fascio di luce e garantirne un'uniforme distribuzione.

OUTER DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE ESTERNO realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.

BASE made in shockproof resin material consisting of a support for post top installation (diam 60mm) and of a cover designed for the inner diffuser fixation.

BASE dell'apparecchio realizzata in resina antiurto, composta da un supporto (diam 60mm) e da un coperchio sul cui viene fissato il diffusore interno.

GINO 400 HIGH POWER LED

F50.000 *



Dimensions and weight

Height: 715 mm
Diameter: 480 mm
Weight: 5,8 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure: CxS = m² 0,157

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 636.

HIGH POWER LED





- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINAIRES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaires equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaires maintenance very simple.

100 - 240 V				
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
CCT SET LED E27	30 W	3620 lm	4000 K 3000 K	.Q1K
LED E27	50 W	6550 lm	4000 K 3000 K	.H1L .H1R

PHOTOMETRIC DATA SAMPLE




GINO 400 E27 HIGH POWER LED 50W


POST height 3,5mt
10x10mt area: average 11 lux

The photometric data for all the versions are available upon request or on our website.

DOWNWARD LIGHT EMISSION



CCT SETTABLE LED LAMP(*)



CCT switch settable in two different positions, to select the desired Kelvin temperature (3000K/4000K) and get a customized ambience. (30W only)


* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GINO 400

LARGE SIZE



MADE IN ITALY

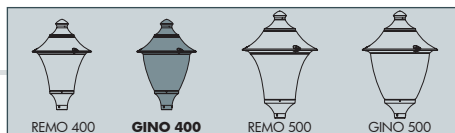

MIDIPILAR/GINO400
F50.254

Pcs 1
Kg 6,4
mc 0,09

NEW LOT/GINO400
F50.115

Pcs 1
Kg 6,1
mc 0,07

GINO400
F50.000

Pcs 1
Kg 5,8
mc 0,06

EKTOR 2500/GINO400
F50.361.000

Pcs 1
Kg 30,1
mc 0,21

EKTOR 3000/GINO400
F50.364.000

AKILLE 3000/GINO400
F50.414.000

Pcs 1
Kg 33,5
mc 0,24

EKTOR 3500/GINO400
F50.367.000

AKILLE 3500/GINO400
F50.417.000

Pcs 1
Kg 26,9
mc 0,26

EKTOR 4000/GINO400
F50.371.000

AKILLE 4000/GINO400
F50.421.000

Pcs 1
Kg 40,3
mc 0,29