

EL[®]MARK

The Brand of Electricity

SINGLE- FUNCTION TIME RELAY, ELR-2A 2C- ON DELAY



Functions:

Single function time relays are suitable for applications where there is a clear function requirement in advance and are suitable for universal use in automation, control and regulation or in house installations. ELR-2A is easy for operation and has range of input voltage- from 24 till 240V AC/DC. Time setting is available from front panel.

TECHNICAL SPECIFICATION


AUTOMATION

ELMARK

The Brand of Electricity

Technical data:

- Voltage range: 24-240V; 50/60Hz
- Output current: 2x5A
- Function: 2C-On delay
- Output type: 2xSPDT
- Time ranges: 1s-3m
- Time setting: via 1 potentiometer
- Time deviation: $< \pm 5\%$
- Repeat accuracy: $< \pm 5\%$
- Ingress protection: IP20
- Mechanical life: 1×10^7
- Electrical life (AC1): 1×10^5
- Max. cable size: solid wire max. 2.5 mm² and flexible wire 1.5 mm²
- Size: 90x18x64 mm

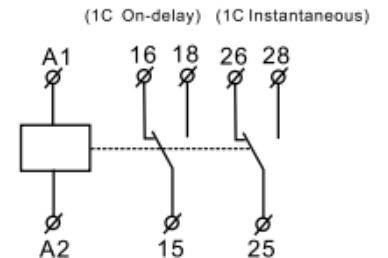

Application:

- Control of electrical appliances
- Control of lights, heating, motors, pump, fan etc.

Variants:

Catalogue number	Type	Dimensions (mm)			Packing/Box (pcs)
		W	H	D	
50151	ELR-2A	18	90	64	1/100

