

# The Brand of Electricity

# UNIVERSAL LIMIT SWITCH – SERIES CZ93-XX



#### LIMIT SWITCHES



## **Description:**

Limit switches of the CZ 93 series are Safety Key Interlock Switches. They are used in object control systems with high safety requirements. The limit switch body is mounted to the fixed system component, while the safety key is mounted to the movable system component. System operation cannot start, unless a full interlocking is achieved. Safety key interlock switches can operate at up to 10A non-inductive resistance load, 3A lamp load and 5A inductive load. They have high operating accuracy at wide variety of speeds. These limit switches are available in two versions depending on the operating contacts number: 2NC and NO+NC

#### Technical data:

Dielectric Strength: 2500V AC

Rated current: 10A active; 3A inductive

Insulation Resistance:  $100m\Omega$  min. (at 500VDC)

Contact Resistance: 25mΩ

Electrical Life (No. of cycles): 50 000 with noninductive load


Mechanical Life (No. of cycles): 2 000 000

Operating frequency: 30 electrical operations/ minute

Operating speed: 0.1mm/s to 0.5m/s

Rated voltage: 230V

■ IP code: IP65

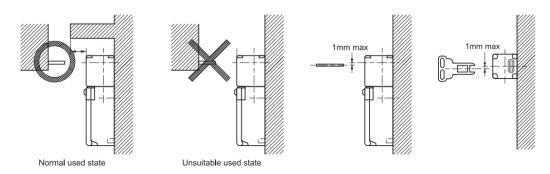


Note: To prevent the wear and the space should be within 1mm between the key and middle of the insert hole.


#### LIMIT SWITCHES



# Type of the contact system:

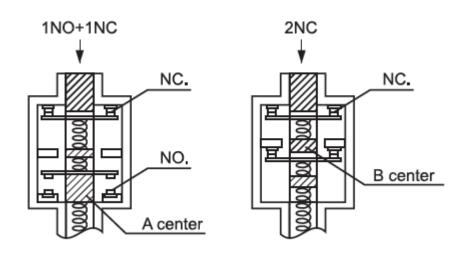


### Variants and Dimensions:

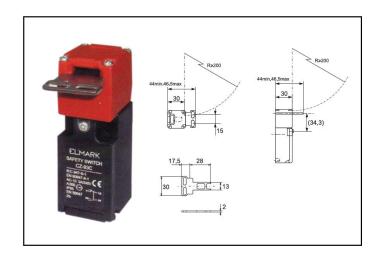


Type	Type of contact blocks	Key type	Power of starting (g)	Power of release (g)	Switching position	General move- ment	Packing / Box (pcs)	Catalogue number
CZ-93BPG01	2NC	CZ93-K1	147N	29.4N	6mm	28mm	10 / 100	46CZ08
CZ-93CPG01	NO+NC	CZ93-K1	147N	29.4N	6mm	28mm	10 / 100	46CZ09



### LIMIT SWITCHES

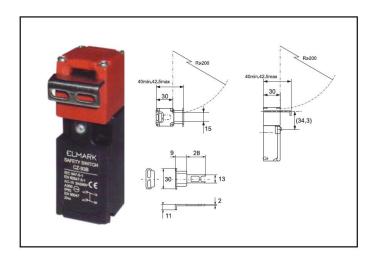

Туре	Type of contact blocks	Key type	Power of starting (g)	Power of release (g)	Switching position	General move- ment	Packing / Box (pcs)	Catalogue number
CZ-93BPG02	2NC	CZ93-K2	147N	29.4N	6mm	28mm	10 / 100	46CZ10
CZ-93CPG02	NO+NC	CZ93-K2	147N	29.4N	6mm	28mm	10 / 100	46CZ11

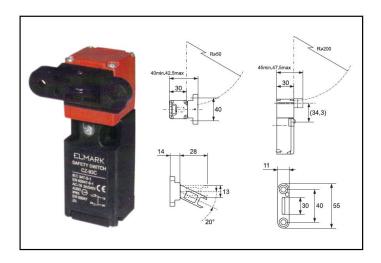

Туре	Type of contact blocks	Key type	Power of starting (g)	Power of release (g)	Switching position	General move- ment	Packing / Box (pcs)	Catalogue number
CZ-93BPG03	2NC	CZ93-K3	147N	29.4N	6mm	28mm	10 / 100	46CZ12
CZ-93CPG03	NO+NC	CZ93-K3	147N	29.4N	6mm	28mm	10 / 100	46CZ13





# Key CZ 93:





Туре	Key Actuating	Packing / Box (pcs)	Catalogue number
CZ 93 – K1	Horizontal	1 / 100	46CZ931
CZ 93 – K2	Vertical	1 / 100	46CZ932
CZ 93 – K3	Adjustable	1 / 100	46CZ933

### **Barcodes:**

3800131149367
3800131130884
3800131149374
3800131130907
3800131149381
3800131130921
3800131149398
3800131149404
3800131149411

Standards EN 60947-1

EN 60947-5-1

