

GU10 LED

TÜV- CB CERTIFIED LED MODULES



SILICONE PROTECTION

DRIVER

INDOOR & OUTDOOR USE

-30 +80 °C

90% HUMIDITY

VOLTAGE SURGE
RESISTANT



CCT SETTABLE

- Switch settable in two different positions, to select the desired Kelvin temperature (2700K, 4000K) and get a customized ambiance.
- 2700k and 4000K led chips on 2 separate circuits to grant SDCM < 6.

2700 K

4000 K



LENS

- Frosted lens with prismatic shape reducing dazzle.
- Made of UV stabilized PMMA to avoid yellowing process.



GOLD WIRE BONDING

- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3528 LED.



DRIVER 100-240V

- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.
- **Double 400V capacitors** and multiple resistances to withstand power surges.



THERMOCONDUCTIVE SILICONE PASTE

- To protect the driver against moisture and humidity up to **90%**, granting a longer product lifetime
- To help heat dissipation thanks to the metal powder inside the paste, granting **-30°+80°C** working temperature.
- To avoid the vibration and the unsoldering of the electronic components of the driver.



HEATSINK


- Made by aluminum and designed to grant a correct heat dissipation.



GU10 LAMPHOLDER

- Quick and easy lamp replacement and version upgrade.
- Made of ceramic material to resist up to 250°.
- VDE certified.



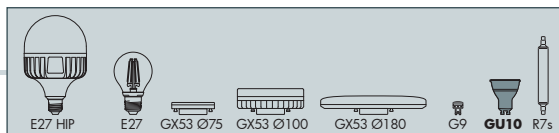

GU10 LED - CCT SETTABLE		
	POWER	6 W
	LUMINOUS FLUX	600 lm
	SIZE & SOCKET	 GU10
	EFFICIENCY	100 lm/W
	VOLTAGE	100-240 V
	FREQUENCY	50/60 Hz
	CURRENT	70 mA
	COLOR RENDERING INDEX RA	> 80
	SDCM	< 6
	BEAM ANGLE	45°
 SILICONE PROTECTION DRIVER INDOOR & OUTDOOR USE -30 +80 °C 90% HUMIDITY VOLTAGE SURGE RESISTANT	WARM UP TIME	≤ 0,5"
	SWITCHING CYCLE	> 25.000
	LIFETIME	25.000 h
	KELVIN SETTABLE	2700 K / 4000 K
	REF. CODE	H2.LED.GU10.CCT
	COMPARISON	6W = 100W 600 Lm halogen SAVE 95%
 LVD EMC ERP 6000h IECEE CB CERTIFICATE: SG PSB-LE-02300A1		